


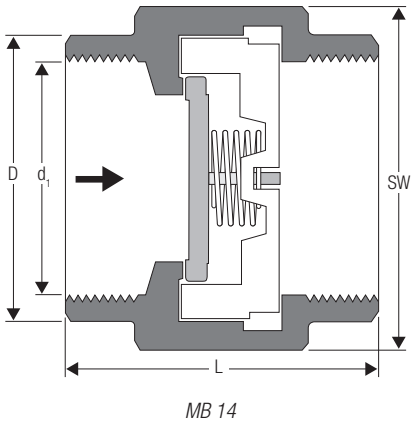

## Non-Return Valves

### **MB 14 PN 16**

### **DN ½" – 2"**

#### **Description**

Non-return valve with screwed end connection; valve design with spring for installation in any position. Metal-to-metal seat. Application for liquids, gases and vapours (observe PED classification).

#### **Pressure/Temperature Rating**

| Nominal sizes         | DN                 | ½" – 2"    |            |            |
|-----------------------|--------------------|------------|------------|------------|
| Nominal pressure      | PN                 | 16         |            |            |
| Max. service pressure | [bar g]<br>[psi g] | 16<br>230  | 14<br>200  | 13<br>185  |
| Related temperature   | [°C]<br>[°F]       | 120<br>248 | 200<br>392 | 250<br>482 |
| Min. temperature*)    | –10 °C (14 °F)     |            |            |            |

\*) Minimum temperature for nominal pressure rating

#### **Connections**

screwed BSP ½" – 2" (to DIN/ISO 228)

#### **Dimensions**

| Nominal sizes |                | DN   | ½"    | ¾"    | 1"    | 1¼"   | 1½"   | 2"   |
|---------------|----------------|------|-------|-------|-------|-------|-------|------|
| Dimensions    | L              | [mm] | 49    | 49    | 61    | 61    | 72    | 72   |
|               | D              | [mm] | 42    | 42    | 62    | 62    | 83    | 83   |
|               | d <sub>1</sub> |      | ½"    | ¾"    | 1"    | 1¼"   | 1½"   | 2"   |
|               | AF             | [mm] | 30    | 30    | 46    | 46    | 65    | 65   |
| Weight        |                | [kg] | 0.230 | 0.181 | 0.648 | 0.490 | 1.244 | 0.94 |

#### **Materials**

| DN ½" – 2" | DIN               |          | ASTM equivalent |
|------------|-------------------|----------|-----------------|
| Body       | Cu Zn 39 Pb 2     | CW 614 N | B 455           |
| Valve disc | X6CrNiMoTi17-12-2 | 1.4571   | A 182 F 316     |
| Spring     |                   |          | A 313 type 316  |
| Retainer   | X5CrNi18-10       | 1.4301   | A 182 F 304     |

Non-Return Valves

**MB 14 PN 16**

**DN ½" – 2"**

**Opening Pressures**

Differential pressures at zero volume flow approx. 15 – 20 mbar.

**Order Specifications**

Type MB 14, DN . . .

Material, fluid, flowrate, pressure and temperature.

**Note:**

The valves should not be used on compressors or where pulsating flow exists.

For these applications please consult us.

**Application of European Directives**

**Pressure Equipment Directive (PED)**

The equipment conforms to this directive and can be used for the following media:

■ Fluids of group 2

**ATEX Directive**

The equipment does not have its own potential ignition source and is not subject to this directive.

Static electricity: When installed, static electricity may arise between the equipment and the connected system.

When used in potentially explosive atmospheres, the plant manufacturer or plant operator is responsible for discharging or preventing possible static charge.

If it is possible for medium to escape, e.g. through actuating mechanisms or leaks in threaded joints, the plant manufacturer or plant operator must take this into consideration when dividing the area into zones.

Supply in accordance with our general terms of business.


**Pressure Drop Chart**

The curves given in the chart are valid for water at 20 °C. To read the pressure drop for other fluids the equivalent water volume flowrate  $\dot{V}_w$  must be calculated and used in the graph.

The values indicated in the chart are applicable for spring-assisted valves with horizontal flow.

$$\dot{V}_w = \dot{V} \cdot \sqrt{\frac{\rho}{1000}}$$

$\dot{V}_w$  = Equivalent water volume flow in l/s or m³/h  
 $\rho$  = Density of fluid (operating condition) in kg/m³  
 $\dot{V}$  = Volume of fluid operating condition) in [l/s] or [m³/h]

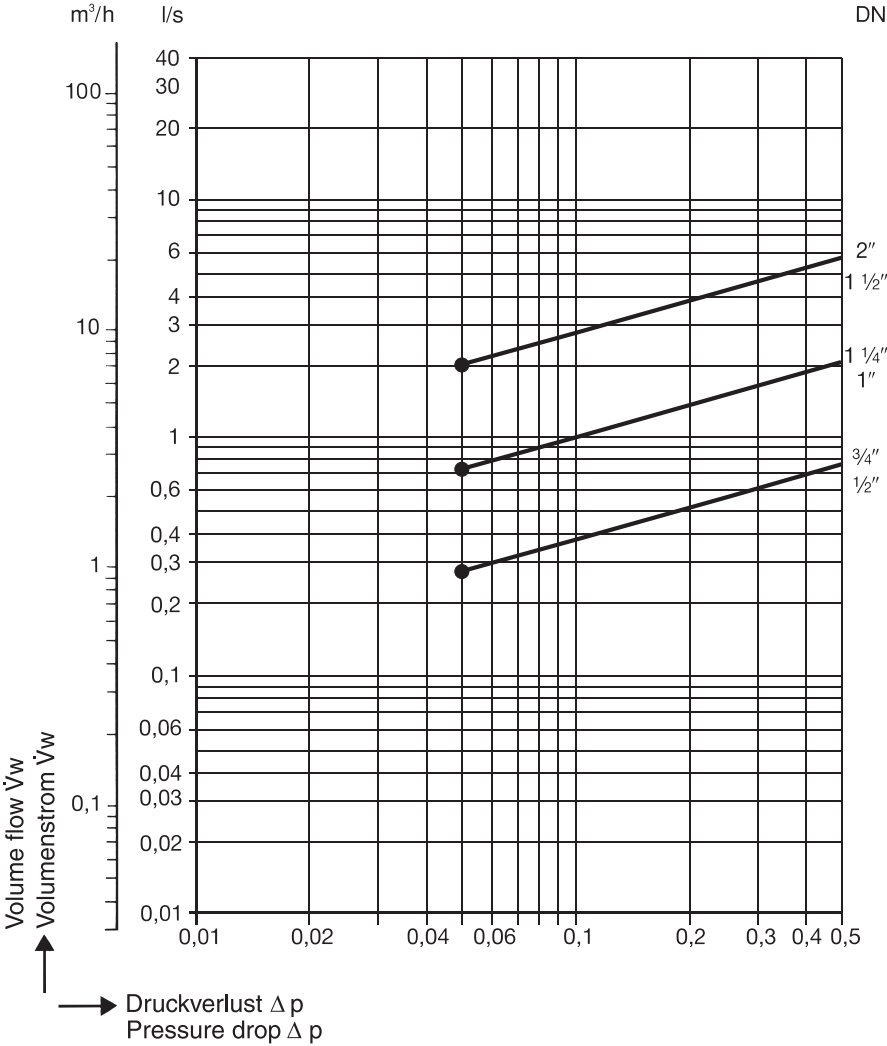

- Required minimum volume flow  $\dot{V}_w$  for equipment with standard spring and horizontal flow.

**GESTRA GmbH**

Münchener Straße 77, 28215 Bremen, Germany  
 Tel. +49 421 3503-0, Fax +49 421 3503-393  
 E-mail [info@de.gestra.com](mailto:info@de.gestra.com), Web [www.gestra.com](http://www.gestra.com)

