



Duo Super Steam Traps

TK 23, TK 24

PN 16 and 25, DN 50 – 100 mm (2 – 4")

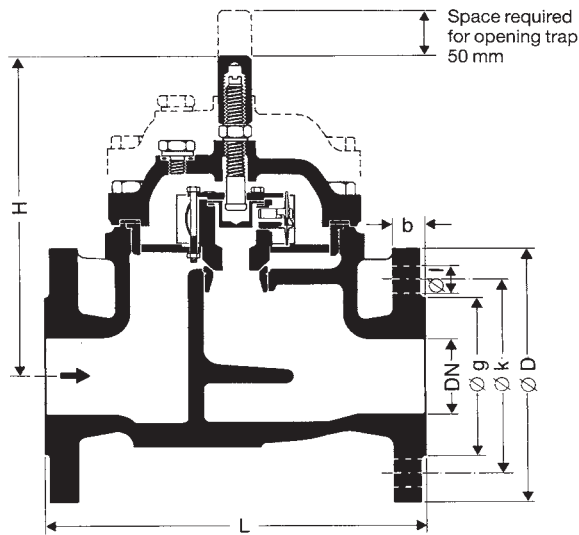

TK 23 and TK 24, DN 50 mm (2")

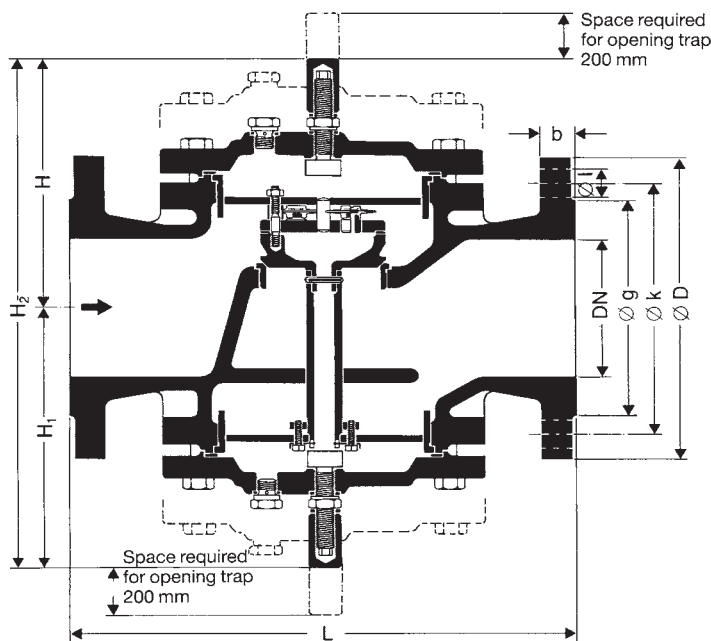

TK 23 and TK 24, DN 65-100 mm (2½-4")

Dimensions and Weights		Trap type							
		TK 23				TK 24			
Nominal sizes DN	mm in	50 2	65 2½	80 3	100 4	50 2	65 2½	80 3	100 4
Dimensions in mm	L	230	290	310	350	230	290	310	350
	H	202	175	175	175	202	180	180	180
	H ₁	—	175	175	188	—	170	170	188
	H ₂	—	350	350	363	—	350	350	368
Flange measurements in mm	D	165	185	200	220	165	185	200	235
	b	20	20	22	24	20	22	24	24
	k	125	145	160	180	125	145	160	190
	g	102	122	138	158	102	122	138	162
Number of bolts	l	18	18	18	18	18	18	18	23
		4	4	8	8	4	8	8	8
Approx. weight	kg	16	25	27	43	17	28	31	56

Steam traps with thermostatic pilot control for high capacities. Corrosion-resistant thermostatic capsules unaffected by waterhammer. With external adjustment device to limit the main valve lift or to ensure a minimum condensate flowrate.

Traps in size 50 mm (2") with 3 thermostatic capsules, in sizes 65-100 mm (2½-4") with 4 thermostatic capsules.

Optionally either with capsules "5 H 2" (standard) or capsules "0 H 2" (for differential pressures < 1 bar [14.5 psi] and service pressures up to 5 bar [70 psi]).

Pressure/Temperature Rating

Regulator	TK 23	TK 24
PMO (Maximum barg operating pressure) psig	13 ¹⁾ 185	21 ¹⁾ 305
TMO (Maximum operating temperature)	Saturated steam temperature relative to the applied pressure	
ΔPMX (Maximum differential pressure) with capsules "0 H 2" bar	up to 5 up to 70 psi	up to 5 up to 70 psi
with capsules "5 H 2" bar	1-10 14.5-145 psi	1-14 14.5-200 psi

Differential pressure: inlet pressure minus outlet pressure

¹⁾ If capsules "0 H 2" are used, the maximum operating pressure PMO is only 5 bar (70 psi).

Body	TK 23 PN 16 GG-25	TK 24 PN 25 GS-C 25
PMA (Maximum allowable pressure) psig	16 10 230 145	25 13 360 185
TMA (Maximum allowable temperature) °C °F	120 300 248 572	120 400 248 752

Materials	DIN reference	ASTM equivalent
Body	TK 23 GG-25 (0.6025)	A 126 Cl. B
	TK 24 GS-C 25 (1.0619)	A 216 Gr. WCB
Cover bolts/fixing studs	TK 23 C 9	—
	TK 24 24 CrMo 5 (1.7258)	A 193 B 7
Thermo- Membrane static capsules	Hastelloy®	
Capsule	Stainless steel	
Other internals	Stainless steel	

Gaskets asbestos-free (graphite/CrNi).

Connections

TK 23: Flanges to DIN (BS 4504), PN 16.

TK 24: Flanges to DIN (BS 4504), PN 25.

Flanges drilled to ANSI on request.

Duo Super Steam Traps

TK 23, TK 24

PN 16 and 25, DN 50 – 100 mm (2 – 4")

Capacity Chart

The chart shows the maximum capacities of hot and cold condensate at factory setting.

Curves 1

Condensate temperature 5 K (degC) below saturation temperature.

Curves 2

Cold condensate at a temperature of 20 °C (start-up capacity).

Spare Parts TK 23, 24; DN 50 mm (2")		
Item No.	Designation	Order No.
2.2a	Thermostatic capsules "5 H 2" (standard)	099511
2.2b	Thermostatic capsules "0 H 2" – (3 off)	085184
2.3	Sleeve gasket	370215
3.2	Plug gasket	000992
4.2	Cover gasket	087509
4.5	Gaskets	013327

Spare Parts TK 23, 24; DN 65-100 mm (2½-4")		
Item No.	Designation	Order No.
2.7a	Thermostatic capsules "5 H 2" (standard)	099511
2.7b	Thermostatic capsules "0 H 2" – (4 off)	085184
2.5	Seat gasket	370216
3.3	Gaskets	000992
4.6a	Cover gaskets for DN 65 and 80 mm (2½ and 3")	087510
4.6b	Cover gaskets for DN 100 mm (4")	087511

When ordering please state



Steam pressure, back pressure, quantity of condensate to be discharged, type, size, mounting position of the trap and details of application.

The following test certificates can be issued on request, at extra cost:


In accordance with DIN 50049-2.2 and -3.1 B.

All inspection requirements have to be stated with the order. After supply of the equipment certificates can no longer be established. Charges and extent of the above mentioned certificates as well as the different tests confirmed therein are listed in our leaflet "Test and Inspection Charges for Standard Equipment". For other tests and inspections than those listed above, please consult us.

Supply in accordance with our general terms of business.

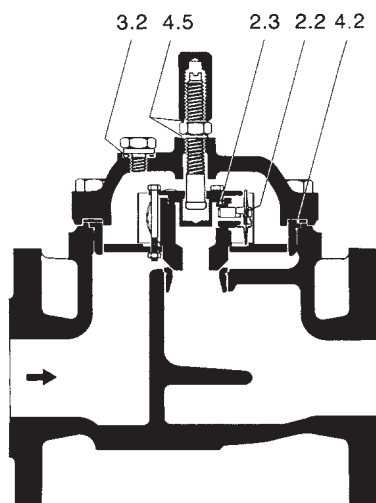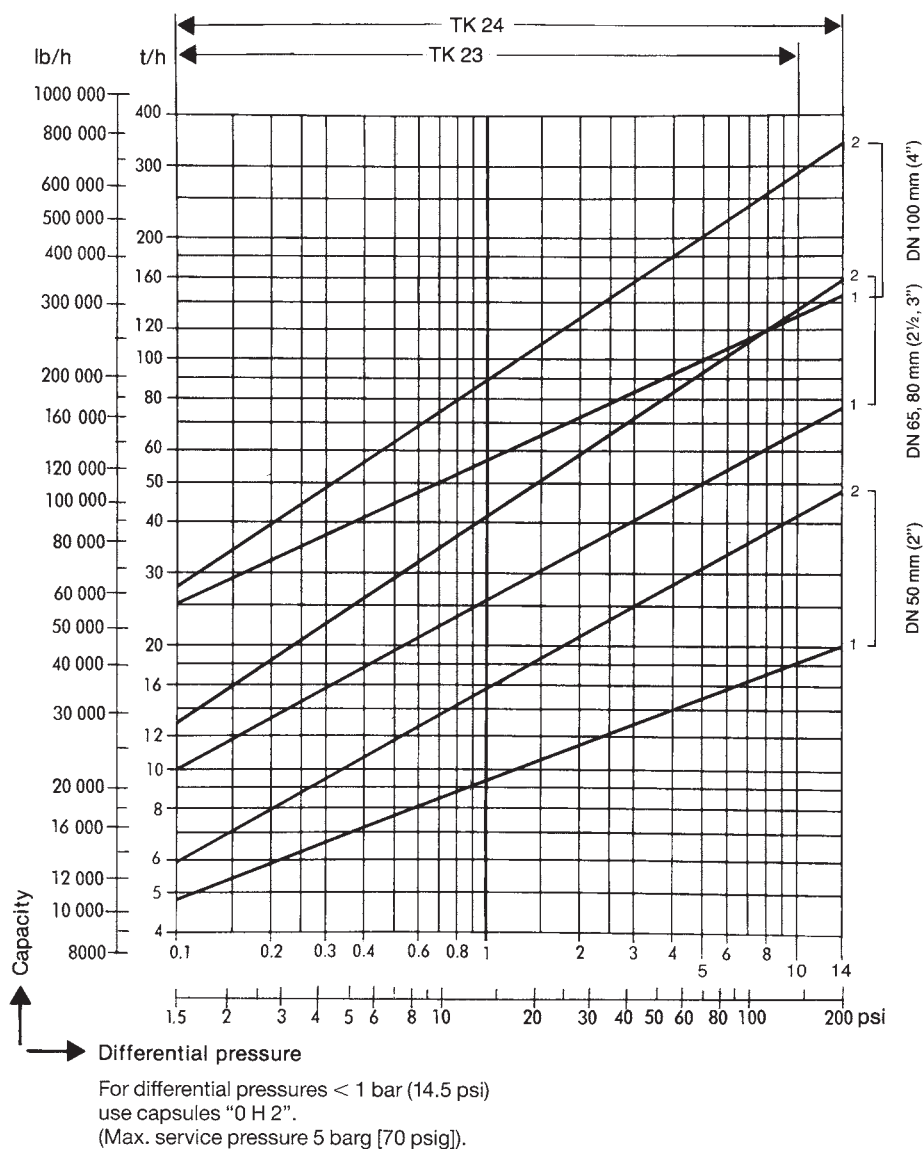

TK 23 and TK 24, DN 50 (2")

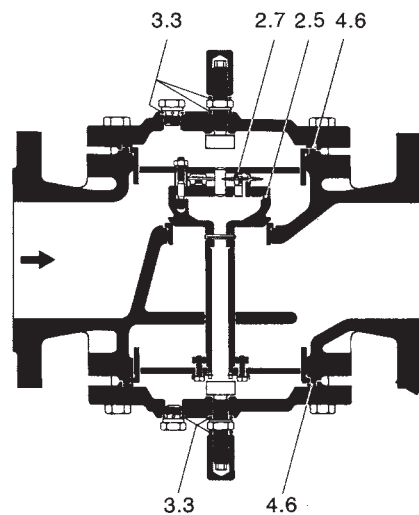

TK 23 and TK 24, DN 65-100 mm (2½-4")

GESTRA GmbH

Münchener Straße 77, 28215 Bremen, Germany
Tel. +49 421 3503-0, Fax +49 421 3503-393
E-mail info@de.gestra.com, Web www.gestra.com

